

# RECESSED 2' X 2' AND 4' X 4' GRID AND FLANGED INDIRECT

**DESCRIPTION & SPECIFICATIONS**

The GID grid and flange series are recessed Indirect fixtures which provide an aesthetically pleasing, glare free environment.

**METAL CONSTRUCTION:**

Metal components are die formed of twenty gauge cold rolled steel. Removal dome allows easy access to lamp compartment.

**FINISH:**



Reflective surface of dome is finished in textured white to provide pleasing and efficient indirect illumination. The main housing is finished in a baked white powdercoat.

**ELECTRICAL COMPONENTS:**

Ballasts are Electronic and CBM-ETL certified. Fixtures are U.L. Listed.

**MOUNTING:**

Designed for mounting in either T-Bar (Grid) or (Flange) ceilings.

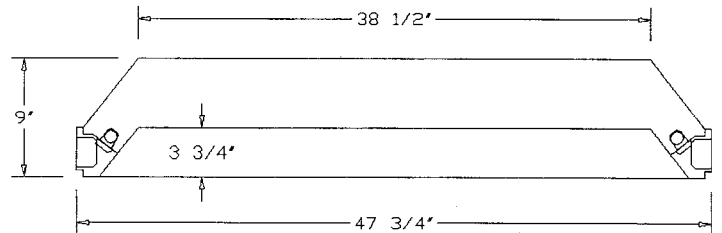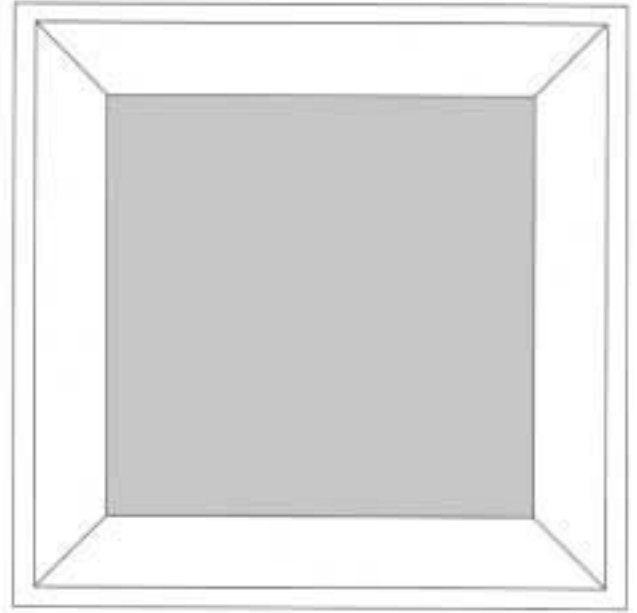

**ORDERING INFORMATION:**

Catalog No.	Lamps	Size
44GID-425	4-F25T8	4' X 4'
22GID-3BX39	4-F39BX	2' X 2'

**FOR FLANGE CHANGE "G" TO "F"**

**ACCESSORIES AND ADDERS:**

277 Volt	277V
Emergency Battery Pack	EM
Standard 20% THD Electronic Ballast	EB8
Optional 10% THD Electronic Ballast	EB10
Dimming	Consult Factory

