
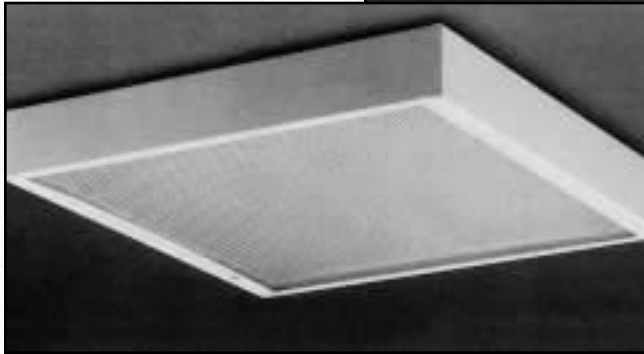


T5

T8

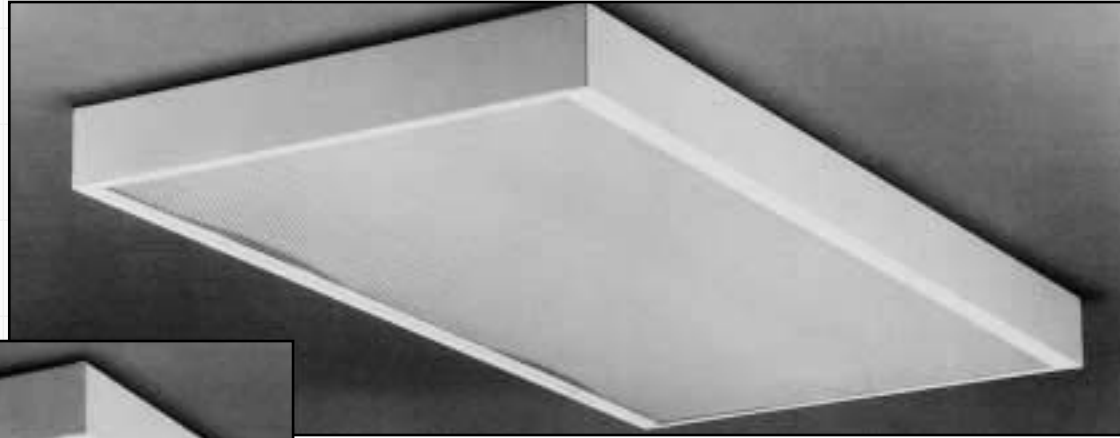

CONSTRUCTION

This popular fluorescent luminaire is die formed from heavy gauge cold rolled steel.

ELECTRICAL

Ballasts are Electronic and CBM-ETL certified Fixtures are U.L. Listed.

MOUNTING

These housings are designed for surface mounting or to be suspended from the ceiling on pendants, individually or in continuous rows. Adequate knock-outs are provided.

FINISH

All metal parts are finished with a Baked White Powdercoat providing a minimum 89% Reflectance.

DIFFUSERS

The door frame can accommodate prismatic lenses, white acrylic dishes, and various types of cube louvers. Prismatic acrylic (A12) Standard.


OPTIONAL DIFFUSERS

Prismatic Acrylic A12		Standard
White Drop Acrylic		DPA
Square Silver Parabolic	1/2" x 1/2" x 1/2"	SPC1
Square Gold Parabolic	1/2" x 1/2" x 1/2"	GPC1
Square Silver Parabolic	1 1/2" x 1 1/2" x 1"	SPC2
Square Gold Parabolic	1 1/2" x 1 1/2" x 1"	GPC2
Square Silver Parabolic	3" x 3" x 1 1/2"	SPC3
Square Gold Parabolic	3" x 3" x 1 1/2"	GPC3
1/2" Cube Louver (white)		EC
Others Available		Consult Factory

All 4 X 4 19S Series supplied with center mullion and two piece plastic. For one piece plastic, specify K-15 or ASFW one piece.



PHOTOMETRIC DATA

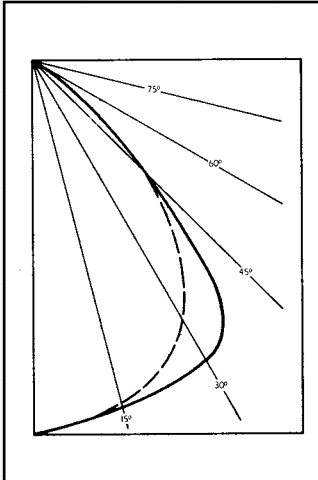

Coefficients of Utilization									
19S-24-232-A12									
Floor	20			20			20		
Ceiling	80			50			10		
Wall	50	30	10	50	30	10	50	30	10
Room Cavity Ratio									
1	.66	.64	.62	.62	.60	.58	.56	.55	.54
2	.59	.55	.52	.55	.52	.50	.50	.48	.46
3	.53	.48	.44	.49	.46	.43	.46	.43	.41
4	.46	.42	.38	.44	.40	.37	.41	.39	.37
5	.42	.36	.33	.40	.35	.32	.37	.33	.31
6	.38	.33	.29	.36	.31	.28	.32	.30	.28
7	.34	.29	.24	.32	.28	.24	.30	.27	.25
8	.30	.25	.22	.29	.24	.21	.27	.23	.20
9	.28	.22	.19	.26	.22	.19	.24	.21	.19
10	.25	.20	.17	.24	.19	.16	.22	.18	.16

Zonal Cavity Method

ORDERING INFORMATION

T5 AND T5HO

Catalog No.	Lamps	Size
19S-12-214T5	2-F14T5	1X2
19S-12-414T5	4-F14T5	1X2
19S-14-228T5	2-F28T5	1X4
19S-14-328T5	3-F28T5	1X4
19S-14-428T5	4-F28T5	1X4
19S-18-228T5-8	4-F28T5	1X8
19S-18-428T5-8	8-F28T5	1X8
19S-24-228T5	2-F28T5	2X4
19S-24-328T5	3-F28T5	2X4
19S-24-428T5	4-F28T5	2X4
19S-22-214T5	2-F14T5	2X2
19S-22-314T5	3-F14T5	2X2
19S-33-321T5	3-F21T5	3X3
19S-33-621T5	6-F21T5	3X3
19S-44-628T5	6-F28T5	4X4
19S-44-828T5	8-F28T5	4X4

19S-12-224T5HO	2-F24T5HO	1X2
19S-14-254T5HO	2-F54T5HO	1X4
19S-14-354T5HO	3-F54T5HO	1X4
19S-18-254T5HO-8	4-F54T5HO	1X8
19S-24-254T5HO	2-F54T5HO	2X4
19S-24-354T5HO	3-F54T5HO	2X4
19S-24-454T5HO	4-F54T5HO	2X4
19S-22-324T5HO	3-F24T5HO	2X2
19S-33-339T5HO	3-F39T5HO	3X3
19S-33-639T5HO	6-F39T5HO	3X3
19S-44-654T5HO	6-F54T5HO	4X4

T8

Catalog No.	Lamps	Size
19S-12-217	2-F17T8	1X2
19S-12-417	4-F17T8	1X2
19S-14-232	2-F32T8	1X4
19S-14-332	3-F32T8	1X4
19S-14-432	4-F32T8	1X4
19S-18-232-8	4-F32T8	1X8
19S-18-432-8	8-F32T8	1X8
19S-24-232	2-F32T8	2X4
19S-24-332	3-F32T8	2X4
19S-24-432	4-F32T8	2X4
19S-22-217	2-F17T8	2X2
19S-22-317	3-F17T8	2X2
19S-22-2U32	3-F32UT8	2X2
19S-33-325	3-F25T8	3X3
19S-33-425	4-F25T8	3X3
19S-33-625	6-F25T8	3X3
19S-44-432	4-F32T8	4X4
19S-44-632	6-F32T8	4X4
19S-44-832	8-F32T8	4X4

ACCESSORIES AND ADDERS:

Damp Location	DL
Regressed Aluminum Door	RD
Tamper Resistant Door	TP
Black Door Frame	BF
Black Housing and Door	BB
Other Colors Available	Consult Factory

ELECTRICAL

277 Volt	277V
Emergency Battery Pack	EM
Standard 20% THD Electronic Ballast	EB8
Optional 10% THD Electronic Ballast	EB10

