

ORDERING INFORMATION:

T5

Catalog No.	Lamps	Size	Actual Size
3012-214T5	2-F14T5	1X2	13 1/2"X25 1/2"
3014-228T5	2-F28T5	1X4	13 1/2"X49 1/2"
3022-314T5	3-F14T5	2X2	26 3/4"X25 1/2"
3022-414T5	4-F14T5	2X2	26 3/4"X25 1/2"
3024-328T5	3-F28T5	2X4	26 3/4"X49 1/2"
3024-428T5	4-F28T5	2X4	26 3/4"X49 1/2"
3033-321T5	3-F21T5	3X3	37 1/2"X38 3/4"
3033-421T5	4-F21T5	3X3	37 1/2"X38 3/4"
3044-628T5	6-F28T5	4X4	50 3/4"X49 1/2"
3044-828T5	8-F28T5	4X4	50 3/4"X49 1/2"

T8

Catalog No.	Lamps	Size	Actual Size
3012-217	2-F17T8	1X2	13 1/2"X25 1/2"
3014-232	2-F32T8	1X4	13 1/2"X49 1/2"
3022-2U32	3-F32UT8	2X2	26 3/4"X25 1/2"
3022-217	2-F17T8	2X2	26 3/4"X25 1/2"
3022-317	3-F17T8	2X2	26 3/4"X25 1/2"
3022-417	4-F17T8	2X2	26 3/4"X25 1/2"
3024-332	3-F32T8	2X4	26 3/4"X49 1/2"
3024-432	4-F32T8	2X4	26 3/4"X49 1/2"
3033-325	3-F25T8	3X3	37 1/2"X38 3/4"
3033-425	4-F25T8	3X3	37 1/2"X38 3/4"
3044-632	6-F32T8	4X4	50 3/4"X49 1/2"
3044-832	8-F32T8	4X4	50 3/4"X49 1/2"

ACCESSORIES AND ADDERS:

ELECTRICAL


277 Volt	277V
Emergency Battery Pack	EM
Standard 20% THD Electronic Ballast	EB8
Optional 10% THD Electronic Ballast	EB10

WOOD FRAME

Natural Oak Finish	NAT
Medium Oak Finish	Standard
Dark Oak Finish	DK
Walnut	WAL
Pine	PN
Birch	BIR
Custom Wood Finish	Consult Factory

DIFFUSERS

White Acrylic	Standard
Prismatic Acrylic	A12
1/2" Square Silver Parabolic	SPCI
1/2" Square Gold Parabolic	GPCI
1/2" Cube Louver (White)	EC
Others Available	Consult Factory

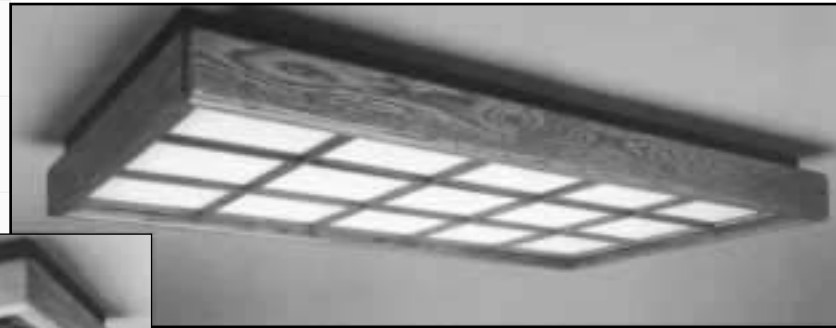

SPECIFICATIONS

DIFFUSER:

100% Virgin acrylic. .080" thick. Secured to frame by removal steel retainers.

FRAME:

Manufactured from solid oak. Hinges from either side without tools. Remains safely suspended while relamping or cleaning. No exposed hinges or latches.

HOUSING:

Matte black, regressed.

ELECTRICAL:

Ballasts are Electronic and CBM-ETL certified. Fixtures are U.L. listed.

ZONAL CAVITY METHOD

Recommended maximum row spacing = 1.25 x mounting height.

PHOTOMETRIC DATA

	Coefficients of Utilization											
	3014-232						3024-432					
	20		10		50		20		10		50	
Floor	20	10	50	20	10	50	20	10	50	20	10	50
Ceiling	50	30	10	50	30	10	50	30	10	50	30	10
Wall	50	30	10	50	30	10	50	30	10	50	30	10
Room Cavity Ratio												
1	.46	.44	.43	.42	.42	.41	.50	.49	.48	.47	.46	.45
2	.41	.39	.37	.38	.37	.36	.45	.43	.41	.42	.41	.39
3	.37	.34	.32	.35	.33	.31	.41	.38	.36	.38	.36	.34
4	.33	.30	.28	.30	.29	.27	.37	.33	.31	.34	.32	.30
5	.30	.27	.24	.28	.26	.24	.33	.29	.27	.31	.28	.26
6	.27	.24	.22	.26	.23	.21	.30	.26	.24	.28	.26	.23
7	.25	.21	.19	.23	.21	.19	.27	.24	.21	.26	.23	.21
8	.22	.19	.17	.21	.19	.17	.25	.21	.19	.23	.21	.19
9	.20	.17	.15	.19	.17	.15	.22	.19	.17	.21	.18	.16
10	.19	.16	.13	.18	.15	.13	.21	.17	.15	.20	.17	.15

DIMENSIONAL DATA

