

T5 T8

SPECIFICATIONS

METAL CONSTRUCTIONS: One piece housing, die-formed of 22 gauge steel. It is grooved along its entire length for rigidity.


SHIELDING: Extruded prismatic acrylic lens. Lens is continuously hinged along its entire length from either side.

FINISH: All metal parts are cleaned and treated with a five-stage phosphate coating then electrostatically sprayed with white powdercoat then baked at 375°F to provide a minimum reflectance factor of 87%.

ELECTRICAL: Ballasts are Electronic and CBM-ETL certified. Fixtures are U.L. Listed.

MOUNTING: Units may be surface or peridant mounted, individually or in continuous rows. In continuous rows, housings may be joined together and

used as continuous wireways. Sufficient knockouts are provided for mounting in any of the usual methods.

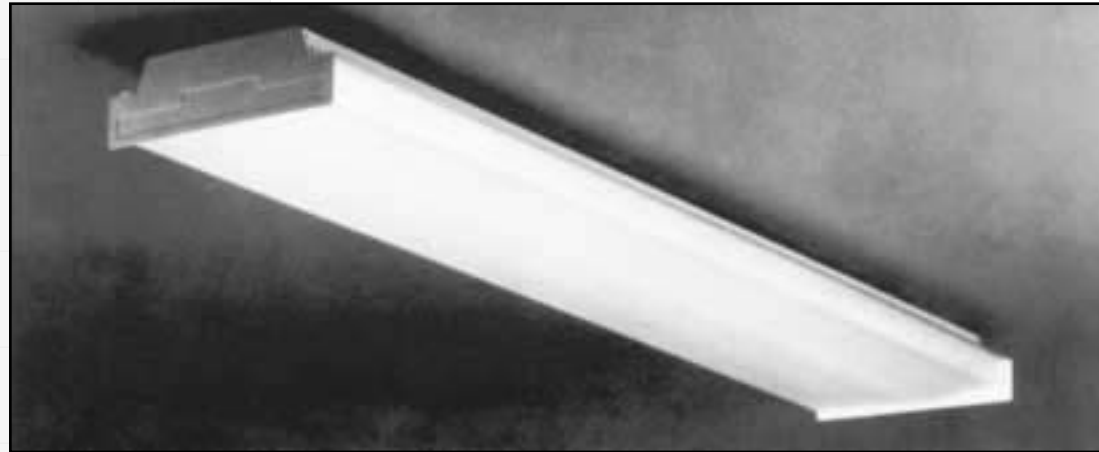

ORDERING INFORMATION:

T5 AND T5HO

Catalog No.	Lamps	Size
WAP-214T5	2-F14T5	9 1/4"X 24"
WAP-221T5	2-F21T5	9 1/4"X 36"
WAP-228T5	2-F28T5	9 1/4"X 48"
WAP-224T5HO	2-F24T5HO	9 1/4"X 24"
WAP-239T5HO	2-F39T5HO	9 1/4"X 36"
WAP-254T5HO	2-F54T5HO	9 1/4"X 48"

T8

Catalog No.	Lamps	Size
WAP-217	2-F17T8	9 1/4"X 24"
WAP-225	2-F25T8	9 1/4"X 36"
WAP-232	2-F32T8	9 1/4"X 48"

ACCESSORIES AND ADDERS:

ELECTRICAL

277 Volt	277V
Emergency Battery Pack	EM
Standard 20% THD Electronic Ballast	EB8
Optional 10% THD Electronic Ballast	EB10
Damp Location	DL

DIFFUSERS

Acrylic Prismatic	Standard
Smooth White Acrylic	SWA
Solid Wood Ends (Oak)	SWE

DIMENSIONAL DATA

