

T5 T8

SPECIFICATIONS


HOUSING: Housing is die formed from 16 gauge steel. Each 16 gauge end is fabricated with a 5/8" flange on three (3) sides for maximum security. The ends are attached to the housing with three tamperproof screws that are removable only with a special screwdriver.

SHIELDING: .125 clear extruded polycarbonate. The lens is retained in place by a linear grooved channel running its entire length and by the end plates.

ELECTRICAL: Ballast are Electronic and CBM-ETL Certified. Fixtures are U.L. Listed.

FINISH: All painted surfaces are baked white enamel on bonderized steel.

MOUNTING: The fixture is designed for individual wall mounting or ceiling mounting. Adequate mounting holes are provided for mounting to an electrical box along with four 5/16" mounting holes for anchoring.

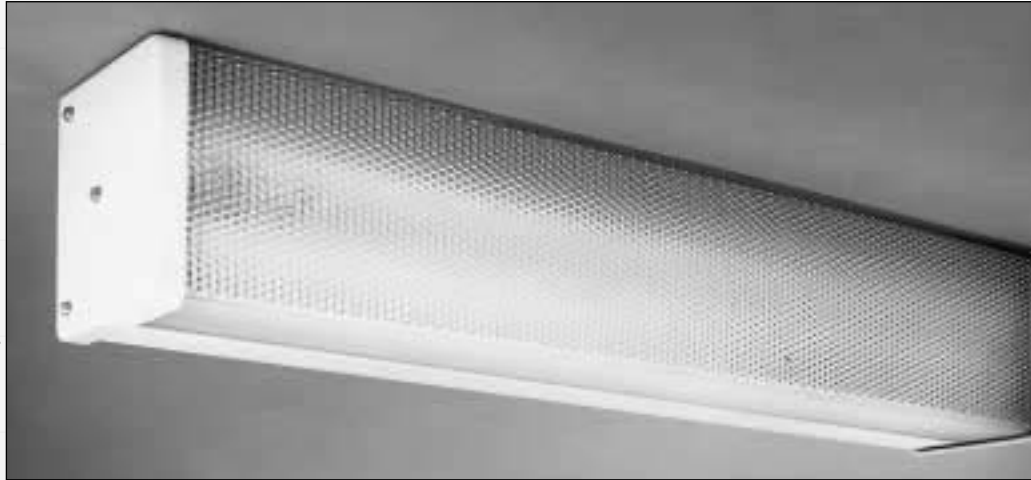

A TAMPER RESISTANT SCREWDRIVER MUST BE ORDERED WITH EACH ORDER

ORDERING INFORMATION:

T5 AND T5HO

Catalog No.	Lamps	Size
VR-114T5	1-F14T5	24 1/4"
VR-214T5	2-F14T5	24 1/4"
VR-121T5	1-F21T5	36 7/8"
VR-221T5	2-F21T5	36 7/8"
VR-128T5	1-F28T5	48 1/4"
VR-228T5	2-F28T5	48 1/4"
VR-124T5HO	1-F24T5HO	24 1/4"
VR-224T5HO	2-F24T5HO	24 1/4"
VR-139T5HO	1-F39T5HO	36 7/8"
VR-239T5HO	2-F39T5HO	36 7/8"
VR-154T5HO	1-F54T5HO	48 1/4"
VR-254T5HO	2-F54T5HO	48 1/4"

T8

Catalog No.	Lamps	Size
VR-117	1-F17T8	24 1/4"
VR-217	2-F17T8	24 1/4"
VR-125	1-F25T8	36 1/4"
VR-225	2-F25T8	36 1/4"
VR-132	1-F32T8	48 1/4"
VR-232	2-F32T8	48 1/4"

FOR 18" FIXTURES

T12 (Magnetic Ballast)

Catalog No.	Lamps	Size
VR-115HTS	1-F15T12	18 1/4"
VR-215HTS	2-F115T12	18 1/4"

ACCESSORIES AND ADDERS:

ELECTRICAL

277 Volt	277V
Emergency Battery Pack	EM
Standard 20% THD Electronic Ballast	EB8
Optional 10% THD Electronic Ballast	EB10
Damp Location	DL
Tamper Resistant Screws	Standard
Tamper Resistant Screwdriver	TPD



DIMENSIONAL DATA

