



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite SET staggered lamp strip luminaire which has a 3" overlap to reduce socket shadows. This luminaire is ideal for commercial, retail and industrial applications.

Specifications:


Construction: Die formed 22 gauge cold rolled steel designed for maximum strength with 7/8" KOs. The housing finish is white polyester polymer with a minimum of 82% reflectance. Luminaires have a 3" overlap to reduce socket shadows.

Reflector / Ballast: Ballast cover / reflector is finished white polyester polymer with a minimum of 82% reflectance. Standard electronic, class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 1 lamp cross-section T8. Nominal 6' or 8' housing is a tandem lamp configuration. Luminaire can be ordered with lamps, consult factory.

Mounting: Surface mounted individually or in continuous rows.

Labels: UL / cUL listed. Suitable for Damp Location optional.

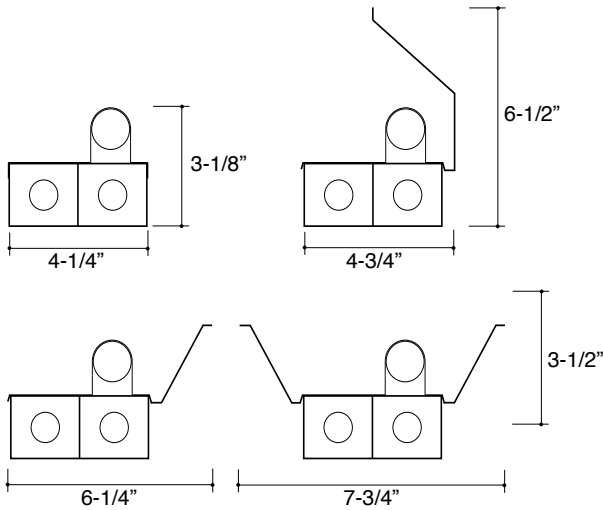

Length	Wattage
24"	17T8
36"	25T8
48"	32T8
69"	25T8-6
93"	32T8-8

Ordering Information

Sample: SET-132T8-120-DL-SYM

Series	Lamp	Wattage	Voltage	Ballast	Options		
SET	1	17T8	UNV	Blank = Instant S.	EM ² Emergency Battery Pack	SYM Symmetrical Reflector	
		25T8	120	PRS = Program S.			DL Damp Location
		32T8	277	DIM ¹ = Dimming	RASY Reverse Asymmetrical Reflector		
		25T8-6	347 ¹			WG ³ Wireguard	
		32T8-8					




Notes:

1. Consult factory.
2. Emergency battery pack is not available for nominal 2' unit; consult factory for 3' unit. Emergency battery pack is not available for UNV voltage code. Specific voltage must be ordered for this option.
3. Wireguard is not available with all reflectors, consult factory.

Calculating Run Lengths

Length	Wattage
24"	17T8
36"	25T8
48"	32T8
69"	25T8-6
93"	32T8-8

The Nulite SET staggered narrow strip is a commercial grade luminaire which has a 3" overlap to reduce socket shadows. See below how to calculate run lengths. We recommend a minimum of 6" to 8" of unlighted portion per each end of the run for luminaires mounted in an architectural detail (cove or slot) by others.

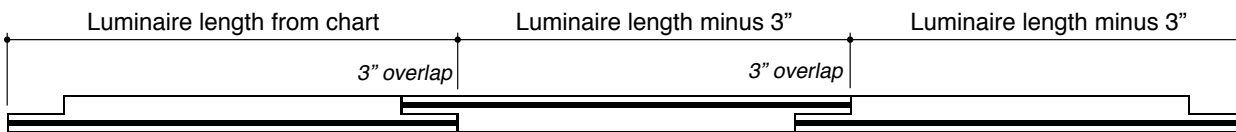

Example: (Two nominal 4' and one nominal 3') = 48" + (48" - 3") + (36" - 3") = 126" (10'-6")