



Open with Clear Ribbed Lens

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite RAZ-R series is a rugged design, decorative, nominal 13" diameter wall pack offered in 3 styles for compact fluorescent or metal halide which is ideal for commercial projects where aesthetics are important.

Specifications:

Construction: Die cast, marine grade aluminum back housing with 3 depths depending on lamp wattage, threaded KO's on sides of deep housings and standard finish is bronze - optional black or white. Lens is injection molded UV stabilized translucent white polycarbonate with internal radial prisms. Lens and housing are gasketed with EPDM ribbed rubber to seal out moisture. Optional Lenses - Clear Ribbed or Frosted Ribbed. Optional injection molded guard - Cross or Eyelid.

Reflector / Ballast: Reflector is formed and finished with high reflectance baked white enamel paint. Ballast is electronic for CFL and open core & coil style for metal halide.

Lamping: 1, 2 or 3 lamp compact fluorescent; 1 lamp pulse start metal halide. Luminaire can be ordered with lamp, consult factory.

Mounting: Surface. 1/2" conduit entry in back; 6-1/2" and 7-7/8" deep housings have threaded side entries too.

Labels: UL / cUL listed, suitable for Wet Locations.


Guard Options:



Cross



Eyelid

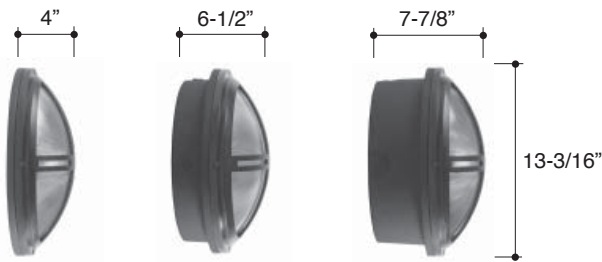

Ordering Information

Sample: RAZR-70MH-277-BZ-C-CLR

Series	Wattage	Voltage	Color	Guard	Lens	Options
RAZR						
	Compact Fluorescent	UNV ⁴	BZ Bronze (Standard)	O Open (Standard)	WH White (Standard)	EM ⁷ Emergency Battery
	126CFQ ¹ (1) 26W/G24q-3	120	BK Black	C Cross	CLR Clear Ribbed	GLR Fusing
	226CFQ ¹ (2) 26W/G24q-3	277	WT White	E Eyelid	FR Frosted Ribbed	TP Tamper Resistant Hardware (Spanner head screws)
	132CFTR ¹ (1) 32W/GX24q-3	347 ⁵	Consult factory for custom colors.			DEP 6-1/4" Deep Housing for CFL 1-light
	232CFTR ² (2) 32W/GX24q-3	480 ⁵				
	142CFTR ¹ (1) 42W/GX24q-4	MT ⁶ Multi-Tap 120/208/240/277				
	242CFTR ² (2) 42W/GX24q-4					
	Pulse Start Metal Halide					
	35MH ³ 35W MH/MED					
	50MH ³ 50W MH/MED					
	70MH ³ 70W MH/MED					
	100MH ³ 100W MH/MED					

Notes:

- Luminaire depth is 3-3/4" without guard, 4" with guard.
- Luminaire depth is 6-1/4" without guard, 6-1/2" with guard.
- Luminaire depth is 7-5/8" without guard, 7-7/8" with guard.
- Universal voltage from 120 to 277V for compact fluorescent only.
- 347 and 480 voltages are not available for all lamp wattages, consult factory.
- Multi-Tap ballast for HID only.
- Only available for compact fluorescent and deep housing 7-5/8" only.