




Dimensions:

70W - 150W HID and CFL
14-1/4"W x 9-1/8"H x 11-3/8"D

250W - 400W HID
18-1/4"W x 9-1/8"H x 17-1/8"D

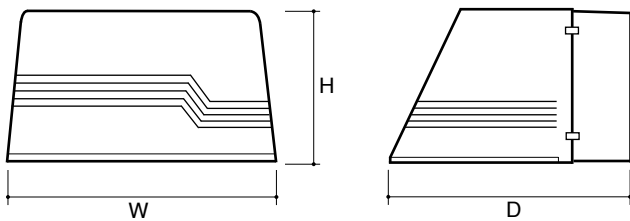

Ordering Information

Sample: EJL-150MH-MT-BK-PG

Series	Wattage	Voltage	Color	Options
EJL				
	Compact Fluorescent	UNV ²	BZ Bronze (Standard)	WT Wide Throw Optics (Standard)
	132CFTR (1) 32W/GX24q-3	120	BK Black	FT Forward Throw Optics
	232CFTR (2) 32W/GX24q-3	277	WH White	QRS Quartz Restrike/Relay
	142CFTR (1) 42W/GX24q-4	347 ³	Consult factory for custom colors.	PC ⁵ Photocell
	242CFTR (2) 42W/GX24q-4	480 ³		PG Prismatic Glass Lens
	High Pressure Sodium	MT ⁴ Multi-Tap 120/208/ 240/277		WG Wireguard
	70HPS 70W HPS/MED			GLR Fusing
	100HPS 100W HPS/MED			TP Tamper Resistant Hardware (Spanner head screws)
	150HPS 150W HPS/MED			-20 ⁶ -20°F Cold Start Ballast
	250HPS 250W HPS/MOG			EM ⁶ Emergency Battery Pack
	400HPS 400W HPS/MOG			EMLT-4 ⁶ Low Temperature -4°F Emergency Battery Pack
	Pulse Start Metal Halide			
	70MH 70W MH/MED			
	100MH 100W MH/MED			
	150MH 150W MH/MED			
	250MH 250W MH/MOG ¹			
	320MH 320W MH/MOG ¹			
	350MH 350W MH/MOG ¹			
	400MH 400W MH/MOG ¹			

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite EJL series is a wall pack which meets "dark sky requirements" with a full cut-off distribution. This luminaire is offered in two sizes, HID and CFL lamping, to meet any project's lighting requirements.

Specifications:

Construction: Die cast aluminum housing, tempered glass lens - clear or optional prismatic, engineered aluminum reflector and powder coat finish - bronze (standard), white or black optional.

Reflector / Ballast: Reflector is semi-specular, hammertone aluminum. Ballast is open core & coil style for HID and electronic for CFL.

Lamping: 1 lamp HID; 1 or 2 lamp CFL. Luminaire can be ordered with lamps, consult factory.

Mounting: Wall mounted for down lighting only. Threaded conduit entries on back and sides of back housing.

Labels: UL / cUL listed, suitable for Wet Locations in down lighting applications only.

Notes:


1. Pulse Start lamps need to be rated for horizontal burn.
2. Universal voltage from 120 to 277V for compact fluorescent only.
3. Not available for all lamp wattages, consult factory.
4. Multi-Tap ballast for HID only.
5. Specific voltage must be ordered for photocell option.
6. Compact fluorescent only. Specific voltage must be specified for EM.

Photometric Data : EJL Series

Characteristics

IES Classification	Type I
Longitudinal Classification	Very Short
Cutoff Classification	Full Cutoff
Total Rated Lamp Lumens	14000
Maximum Candela	3920
Maximum Candela Angle	175H 25V
Maximum Candela at 90 Vertical	0
Maximum Candela from 0 to 90 Vert.	192 (1.37% Lamp Lumens)
Downward Total Efficiency	42.8%

Distance in 10' units. Luminaire mounted @ 20' AFG

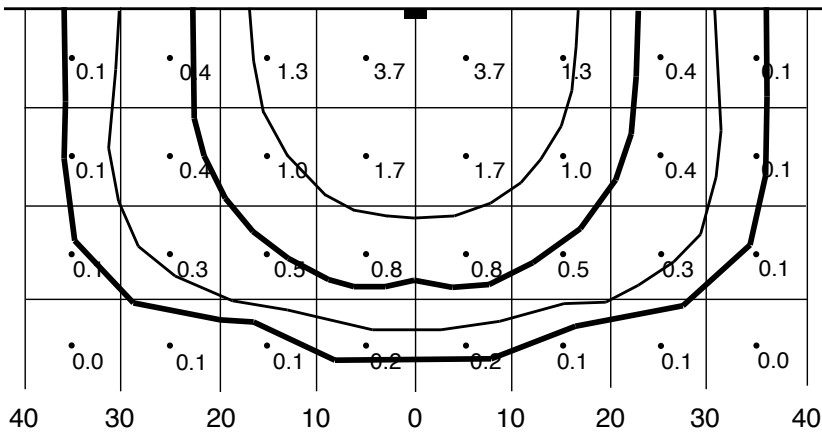

Specifications and dimensions are subject to change without notification.