



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite B21 series is a companion to the B19 series of solid front design and a linear prismatic “batwing” lens for maximum lateral distribution.

Specifications:

Construction: Die formed cold rolled steel housing. All metal parts are finished with a durable baked white enamel paint.



Diffuser: Linear acrylic “lift and shift” batwing lens.

Reflector / Ballast: Reflector pan & ballast cover are finished with high reflectance white. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 1 T5 lamp cross-section in nominal 2’, 3’ or 4’ lengths. Luminaire can be ordered with lamp, consult factory.

Mounting: Surface mounting, individually or continuous rows.

Labels: UL / cUL listed. Damp location is optional.

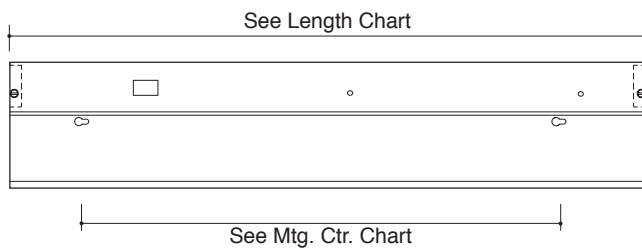

Length	Mtg. Ctr.	Wattage
12-1/4"	7-3/4"	8T5
22-5/8"	17-3/4"	14T5
34-1/2"	29-1/2"	21T5
46-1/4"	41-3/8"	28T5

Ordering Information

Sample: B21-128T5-120-RS

Series	Lamp	Wattage	Voltage	Options
B21	1			
		8T5	UNV ¹	CO Convenience Outlet (120V Only)
		14T5	120	RS Rocker Switch (120V Only)
		21T5	277	DL Damp Location
		28T5		CP3/6 Cord & Plug; 120V, 3-wire (6')

Notes:

1. 8W T5 not available in universal voltage. Instant start ballast only for 8W T5.