NULITE™

IT Series

Project Name:	
Type:	Date:
Catalog #:	

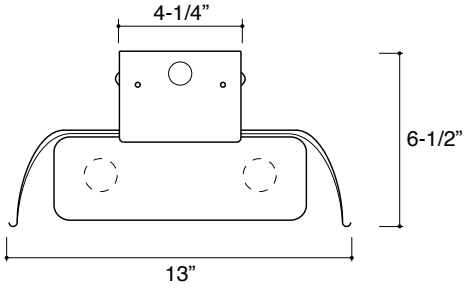

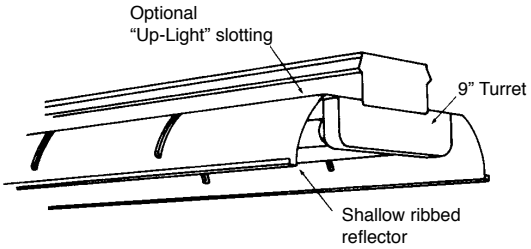

Length	Wattage
49-5/16”	32T8
98-3/4”	32T8-8, 59T8

Description:

The Nulite IT is a turret industrial grade luminaire which is ideal for retail, commercial and industrial applications. The IT may be mounted surface or suspended, individually or in continuous row.

Specifications:

Construction: Die formed, 20 gauge, cold rolled steel designed for high strength. The housing finish is white baked enamel. End caps snap in for easy installation and maintenance.

Reflector / Ballast: Reflector is finished with a minimum of 87% reflectance white baked enamel. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 2, 3 or 4 lamp cross-section T8. Nominal 8’ housing is a tandem lamp configuration for 32W. Luminaire can be ordered with lamps, consult factory.

Mounting: Luminaires may be surface mounted or suspended, individually or in continuous row. For continuous row mounting, standard end caps act as a sleeve coupler. The housing forms a continuous wireway.

Labels: UL / cUL listed. Damp location is optional.

Ordering Information

Sample: IT-232T8-UNV-ISL-3C

Series	Lamp	Wattage	Voltage	Ballast		Options		Mounting	
IT									
	2	32T8	UNV	T8 Options	Ballast Factor	EM[2]	Emergency Battery Pack	3C	3’ Chain Set
	3	32T8-8	120	IS *(Standard)* Instant Start	N Normal *(Standard)*	DL	Damp Location	SC	Stem & Canopy *Specify length*
	4	59T8 (F96T8)	277	PS Program Start	L Low	WG	Wireguard		
			347[1]	HEIS High Efficiency Instant Start	H High	AP	Aperture Reflector		
				HEPS High Efficiency Program Start		CEP	Closed Endplates		
						QW	Quick Through Wiring for Continuous Row Applications		
						GLR	Fusing		

Notes:
1. Consult factory.
2. Specific voltage must be ordered for this option.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B
Nulite reserves the right to bulk package any order.

Nulite Lighting 10770 East 51st Avenue, Denver, CO 80239 Phone 303-287-9646 Fax 303-287-0316 www.nulite-lighting.com

Industrial Options



White threaded stem and matching canopy. Available in lengths from 6” to 10’.

Stem & Canopy Set (SC)



36” lengths of chain, “S” hook, and “Y” hanger. Chain and hook 12 gauge.

Chain Set (3C)



10% apertured for uplight.

Apertured Reflector (AP)



Heavy steel wire guard. (4’ section)

Wire Guards (WG)

Plan view of KOs on back of channel

All housings have 7/8” KOs on both ends as well as on the back of the channel. In addition, each channel has eyelets and other holes for mounting by various means.

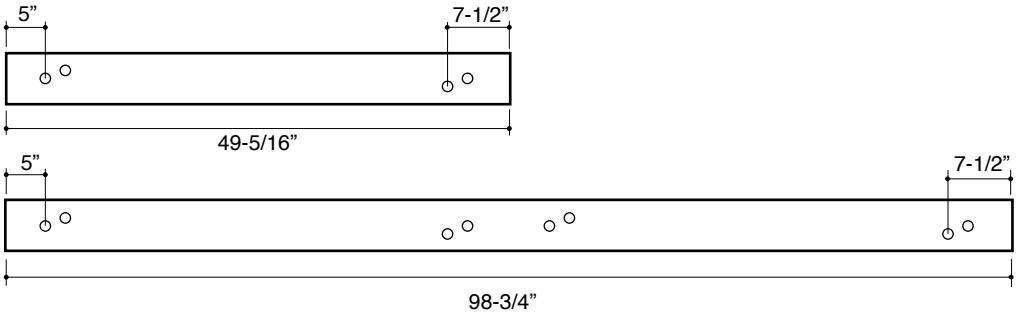

Specifications and dimensions are subject to change without notification.