

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite INT is an ideal solution for lighting cold storage, food processing, parking garages, open exterior structures, commercial and industrial applications. The luminaire housing is NSF certified.

Specifications:

Construction: Rugged corrosion resistant white housing is comprised of fiberglass, continuous closed cell gasket, ribbed acrylic diffuser, toggle latches and end plugs.

Diffuser: Ribbed 85/15 DR acrylic. Optional polycarbonate ribbed lens (not recommended for food processing).

Reflector / Ballast: Ballast cover/reflector is formed of 20 gauge cold rolled steel with a white powder coat finish. Optional Miro®4 specular anodized aluminum performance reflector. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.


Lamping: 1 and 2 lamp cross-section T5, T5HO or T8; 3 lamp cross-section T5 or T8. Luminaire can be ordered with lamps, consult factory.

Mounting: Pair of stainless steel mounting brackets included.

Labels: UL / cUL listed for Wet Location, IP67, NSF/ANSI Standard 2 certified.

Narrow Body Option
(1 lamp, Nom. 4' Only)

1, 2 or 3 Lamp End View

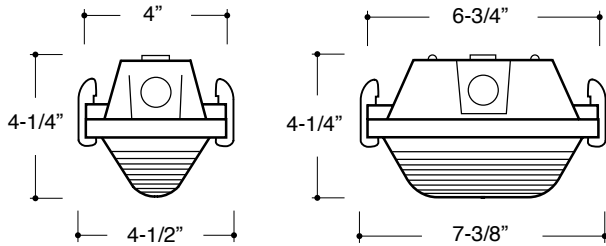

Length	Wattage
28"	14T5, 24T5HO, 17T8
52"	28T5, 54T5HO, 32T8
100"	28T5-8, 54T5HO-8, 32T8-8, 59T8

Ordering Information

Sample: INT-254T5HO-277-PSN-RM1-OS65

Series	Lamp	Wattage	Voltage	Ballast	Options			
INT	1 2 3 ¹	14T5	UNV	T8 Options	EM ⁴ Emergency Battery Pack	NB Narrow Body (1 lamp, 4' only)	POLY ⁶ Polycarbonate Lens	
		24T5HO		IS (Standard)				N Normal
		17T8		PS				L Low
		28T5	277	HEIS	SJT/6 ³ 6' SJT Cord	-20 ⁵ -20°F Start Temp. Ballast	OS65 Occupancy Sensor IP65 (Refer to technical page for distribution)	
		54T5HO		HEPS				H High
		32T8	480 ²	T5/T5HO	CP3/6 ³ 6' SJT Cord Plug	MLS Multi-level Switching	CP3/6 (NEMA) ³ 6' SJT Cord - (NEMA Plug Designation) ie. CP3/6-(L7-20)	
		28T5-8		PS (Standard)				N Normal
		54T5HO-8		HEPS ²				
		32T8-8	All Lamp Dimming Options			RM1 Performance Reflector	SSL Optional Stainless Steel Latches	
		59T8 (F96T8)	DIM ² Dimming		GLR Fusing			HE (1) 1/2" End Hub Entry (Factory Installed)
	SD ² Step Dimming							
	IS=Instant Start PS=Program Start HEIS=High Efficiency Instant Start HEPS=High Efficiency Program Start							

Notes:

- Maximum ambient operating temperature is 45°F for T5HO.
- Consult factory.
- Luminaire is listed for Damp Location for this option. Consult factory for Wet Location with cord.
- Specific voltage must be ordered for this option. Consult factory for nom. 2' units.
- Not available for 59W T8.
- Not available for 8' unit.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2011 Rev. C Nulite reserves the right to bulk package any order.