

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite 16 series is a low profile surface mounted lensed luminaire. The smooth white acrylic lens softens lamp brightness and the housing is painted after fabrication. This luminaire is ideal for corridors, walkways and stairwells.

Specifications:

Construction: Housing is die formed of 20 gauge cold rolled steel. All metal parts are finished with white polyester powder coat paint. Housing is designed for snap-on smooth opal acrylic lens.


Reflector / Ballast: Ballast cover/reflector is formed and finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 1 or 2 lamp cross-section T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.

Mounting: Surface, individually and continuous rows.

Labels: UL / cUL listed. Damp location is optional.

End View

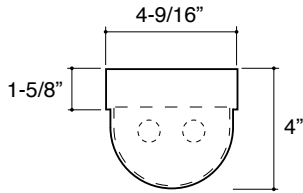

Length	Wattage
24-3/16"	14T5, 24T5HO, 17T8
36-3/16"	21T5, 39T5HO, 25T8
48-3/16"	28T5, 54T5HO, 32T8
96-3/16"	28T5-8, 54T5HO-8, 32T8-8

Ordering Information

Sample: 16-232T8-120-ISN-DL

Series	Lamp	Wattage	Voltage	Ballast	Options	
16						
	1	14T5	UNV	T8 Options	Ballast Factor	EM ² Emergency Battery Pack
	2	24T5HO	120	IS (Standard) Instant Start	N Normal (Standard)	DL Damp Location
		17T8	277	PS Program Start	L Low	AL Aluminum Housing
		21T5	347 ¹	HEIS High Efficiency Instant Start	H High	SS Stainless Steel Housing (Unfinished)
		39T5HO		HEPS High Efficiency Program Start		CR Continuous Row (End 7/8" KO)
		25T8				QW Quick Through Wiring for Continuous Row Applications
		28T5				GLR Fusing
		54T5HO		T5/T5HO	Ballast Factor	
		32T8		PS (Standard) Program Start	N Normal	
		28T5-8		HEPS ¹ High Efficiency Program Start		
		54T5HO-8				
		32T8-8				
				All Lamp Dimming Options		
				DIM ¹ Dimming		
				SD ¹ Step Dimming		


Notes:

1. Consult factory.
2. Specific voltage must be ordered for this option. Consult factory for nominal 2' and 3' units.


Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B Nulite reserves the right to bulk package any order.

Photometric Curve

Cat.# 16-232T8...
Initial lamp lumens - 5800

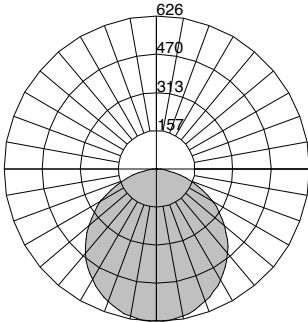

Plan view of KOs on back of channel

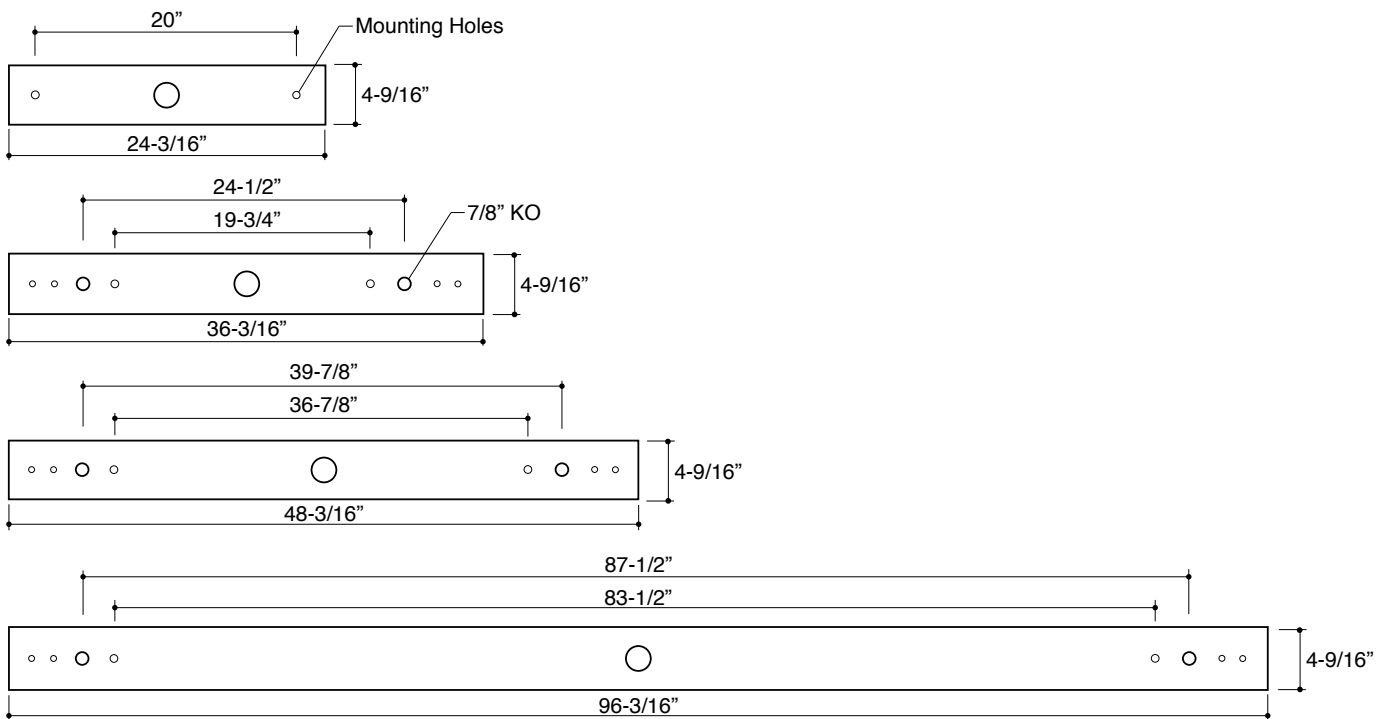

Specifications and dimensions are subject to change without notification.