

Length	Wattage
24"	14T5, 24T5HO, 17T8
48"	28T5, 54T5HO, 32T8
96"	28T5-8, 54T5HO-8, 32T8-8

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite WA series is a low profile surface mounted wrap-around luminaire. This unit is a cost-effective solution for illuminating corridors, stairwells, classrooms and office areas.

Specifications:

Construction: Housing is die formed of heavy gauge cold rolled steel with side flanges for extra uniformity. End plates are embossed for rigidity. All metal parts are finished with white enamel paint. Housing is designed for snap-on lens. Prismatic lens standard - optional smooth white acrylic diffuser.

Reflector / Ballast: Ballast cover/pan is formed and finished with high reflectance white paint. Optional Miro®4 reflector. Standard electronic, Class P, ballast. Universal (UNV) voltage is from 120 to 277V.

Lamping: 2, 3 or 4 lamp cross-section T5, T5HO or T8. Nominal 8' unit is a tandem lamp configuration, and provided with two 4' lenses joined with plastic strap. Luminaire can be ordered with lamps, consult factory.

Mounting: Surface ceiling, individually or in continuous rows.

Labels: UL / cUL listed. Damp location is optional.

Ordering Information

Sample: WA-232T8-UNV-PSN-EM


Series	Lamp	Wattage	Voltage	Ballast	Options	
WA	2 3 ¹ 4	14T5	UNV 120 277 347 ²	T8 Options	Ballast Factor	EM ³ Emergency Battery Pack ASW Smooth White Acrylic Lens M4 Miro® 4 Reflector DL Damp Location QW Quick Through Wiring for Continuous Row Applications GLR Fusing
		24T5HO		IS (Standard) Instant Start	N Normal (Standard)	
		17T8		PS Program Start	L Low	
		28T5	HEIS High Efficiency Instant Start	H High		
		54T5HO	HEPS High Efficiency Program Start			
		32T8	T5/T5HO	Ballast Factor		
		28T5-8	PS (Standard) Program Start	N Normal		
		54T5HO-8	HEPS ² High Efficiency Program Start			
		32T8-8	All Lamp Dimming Options			
			DIM ² Dimming			
	SD ² Step Dimming					

Notes:


- 3-Lamp not available in 24" length.
- Consult factory.
- Specific voltage must be ordered for this option. Consult factory for nominal 2' units.

Photometric Curve

Cat.# WA-232T8...
Initial lamp lumens - 5800



Plan view of KOs on back of housing

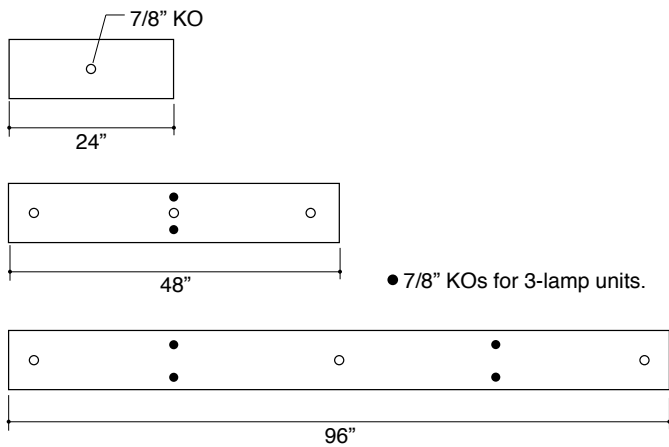

Specifications and dimensions are subject to change without notification.