



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite WAVR series is a vandal resistant low profile surface mounted lensed luminaire. The polycarbonate prismatic lens and rugged housing will withstand high traffic applications.

Specifications:

Construction: Housing is die formed of 16 gauge cold rolled steel. Housing is finished with white polyester powder coat paint. Extruded clear prismatic polycarbonate lens removable by tamper resistant spanner head screws.


Reflector / Ballast: Ballast cover/pan is formed and finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 2 or 4 lamp cross-section T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.


Mounting: Surface.

Labels: UL / cUL listed. Damp location is optional.

(2-light)



(4-light)

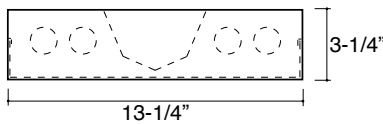

Length	Wattage
25"	14T5, 24T5HO, 17T8
37"	21T5, 39T5HO, 25T8
49"	28T5, 54T5HO, 32T8

Ordering Information

Sample: WAVR-432T8-UNV-ISN-DL

Series	Lamp	Wattage	Voltage	Ballast	Options
WAVR	2	14T5	UNV 120 277 347 ¹	T8 Options	EM. ² Emergency Battery Pack DL Damp Location SS Stainless Steel Housing (Unfinished) GLR Fusing
		4		24T5HO	
	17T8	N Normal (Standard)			
	21T5	L Low			
	39T5HO	H High			
	25T8	IS (Standard) Instant Start			
	28T5	PS Program Start			
	54T5HO	HEIS High Efficiency Instant Start			
	32T8	HEPS High Efficiency Program Start			
				T5/T5HO	
		PS (Standard) Program Start	N Normal		
		HEPS ¹ High Efficiency Program Start			
		All Lamp Dimming Options			
		DIM ¹ Dimming			
		SD ¹ Step Dimming			

Notes:


1. Consult factory.

2. Specific voltage must be ordered for this option. Consult factory for nominal 2' units.




Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2011 Rev. B2 Nulite reserves the right to bulk package any order.

Photometric Curve

Cat.# WAVR-232T8...
Initial lamp lumens - 6100 (2 lamps)



Plan view of KOs on back of housing

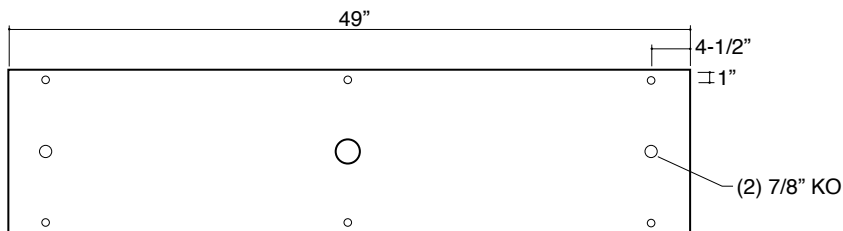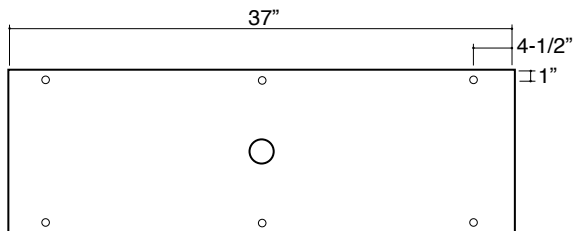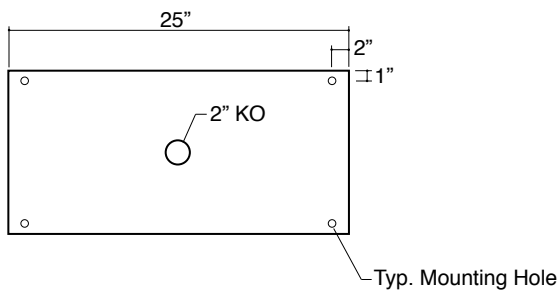

Specifications and dimensions are subject to change without notification.