



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite “W” 6x6 series is designed as a wall mount luminaire with three light distributions - direct, direct/indirect or indirect. This series can be mounted individually or continuously, and is ideal for lobbies, corridors or office areas. Standard shielding is a prismatic lens.

Specifications:


Construction: Housing is die formed and welded of 20 gauge cold rolled steel. Two, 4-1/2” x 4-1/2” x 1”, wall brackets are formed of cold rolled steel. Housing and brackets are finished with white powder coat paint. Standard prismatic acrylic lens.

Reflector / Ballast: Ballast cover/reflector is finished with high reflectance white powder coat paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120V to 277V.

Lamping: 1 or 2 lamp cross-section in nominal 2’, 3’, 4’, 6’ or 8’ lengths. Luminaire can be ordered with lamp, consult factory.

Mounting: Units can be mounted flush against the wall or hung with wall brackets. Two brackets per unit length - 2’, 3’, 4’, 6’ or 8’.

Labels: UL / cUL listed. Damp location is optional.

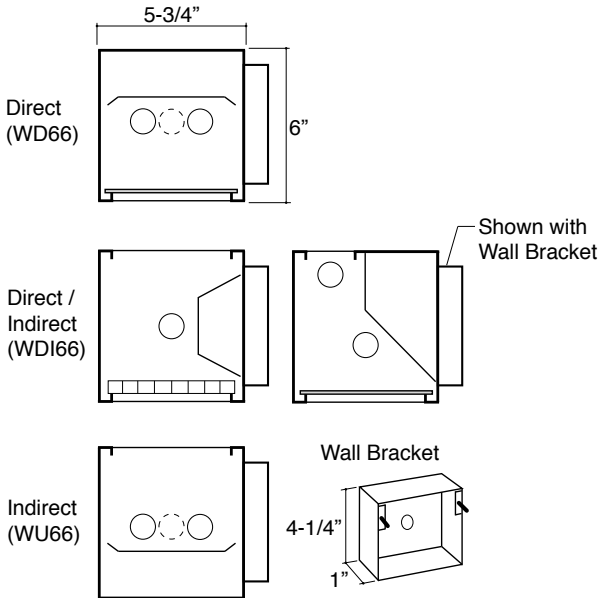

Length	Wattage
24"	14T5, 24T5HO, 17T8
36"	21T5, 39T5HO, 25T8
48"	28T5, 54T5HO, 32T8
72"	21T5-6, 39T5HO-6, 25T8-6
96"	28T5-8, 54T5HO-8, 32T8-8

Ordering Information

Sample: WU66-232T8-UNV-HEISH-WH

Series	Lamp	Wattage	Voltage	Ballast	Color	Options		
WD66 <i>(Direct)</i>	1	14T5	UNV	T8 Options	WH White <i>(Standard)</i>	EM ² Emergency Battery Pack		
WDI66 <i>(Direct/Indirect)</i>		24T5HO		IS <i>(Standard)</i>		N Normal <i>(Standard)</i>	DL Damp Location	
WU66 <i>(Indirect)</i>	2	17T8	120	PS	Consult factory for custom color.	ASW Smooth White Acrylic		
		21T5	277	HEIS		L Low	SPC1 Square Silver Parabolic (1/2")	
		39T5HO	347 ¹	HEPS		H High	SPC2 Square Silver Parabolic (1-1/2")	
		25T8		T5/T5HO		N Normal	EC White Cube Louver (1/2")	
		28T5		PS <i>(Standard)</i>			CBW 1"H x 1" o.c. White Cross Baffle	
		54T5HO		HEPS ¹			PBS 1-3/8"H x 2" o.c. Semi-specular Aluminum Parabolic Cross Baffle	
		32T8	All Lamp Dimming Options					QW Quick Through Wiring for Continuous Row Applications
		21T5-6	DIM ¹ Dimming					
		39T5HO-6	SD ¹ Step Dimming					
		25T8-6	IS=Instant Start					
28T5-8	PS=Program Start							
54T5HO-8	HEIS=High Efficiency Instant Start							
32T8-8	HEPS=High Efficiency Program Start							

Notes:
 1. Consult factory.
 2. Specific voltage must be ordered for this option.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B
 Nulite reserves the right to bulk package any order.

Photometric Curve

Cat.# WD66-132T8...
 Initial lamp lumens - 2900
 Prismatic lens and white reflector

