



Project Name:	
Type:	Date:
Catalog #:	

**Description:**

The Nulite F series are commercial grade recessed flanged troffers. Unit has a concealed latch hinge door with standard A12 prismatic lens.

**Specifications:**

**Construction:** Die formed housing of 23 gauge cold rolled steel with embosses for maximum rigidity. Housing is finished with white enamel paint. Snap-in access plate for easy wiring without opening luminaire.


**Reflector / Ballast:** Ballast cover/pan is finished with high reflectance white enamel paint. Standard electronic, Class P, ballast. Universal (UNV) voltage is from 120 to 277V.

**Shielding:** A12 prismatic lens standard. Optional - A15 pattern, smooth white lens, clear acrylic or drop white acrylic lens.

**Lamping:** 1, 2, 3 or 4 lamp cross-section of T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.

**Mounting:** Non-grid ceiling. Leveling lugs are provided for adjustment. Non-IC rated.

**Labels:** UL / cUL listed. Non-IC rated. Damp location is optional.

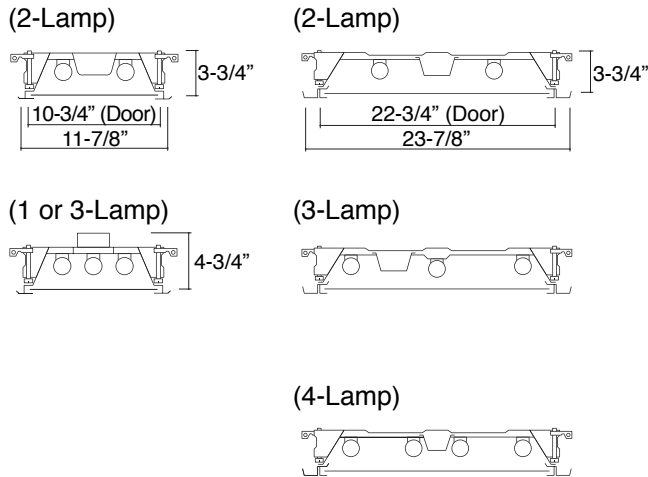

**Ordering Information**

Sample: F2-332T8-277-HEPSL-EM


Series	Lamp	Wattage	Voltage	Ballast	Options	
F1 (1x2 or 1x4)	1 <sup>1</sup> 2	(1x2 or 2x2) 14T5 24T5HO	UNV 120 277	T8 Options	Ballast Factor	EM <sup>3</sup> Emergency Battery Pack DL Damp Location A15 A15 Pattern Lens CL Clear Acrylic Lens DPA Drop White Acrylic Lens
				IS (Standard) Instant Start PS Program Start HEIS High Efficiency Instant Start HEPS High Efficiency Program Start	N Normal (Standard) L Low H High	
F2 (2x2 or 2x4)	3 <sup>1</sup> 2 3 4	(1x4 or 2x4) 28T5 54T5HO 32T8	347 <sup>2</sup>	T5/T5HO	Ballast Factor	ASW Acrylic Smooth White Lens GLR Fusing FLEX3 6' of Flex, 3-wire FLEX4 6' of Flex, 4-wire. (Consult factory - requires dual circuit)
				PS (Standard) Program Start HEPS <sup>2</sup> High Efficiency Program Start	N Normal	
				All Lamp Dimming Options		
				DIM <sup>2</sup> Dimming SD <sup>2</sup> Step Dimming		

**Notes:**

1. Not available for T5 and T5HO.
2. Consult factory.
3. Specific voltage must be ordered for this option. Consult factory for nominal 2' units.

**Photometric Curve**

Cat.# F2-432T8...  
 Initial lamp lumens - 11600 (4 lamps)



*Specifications and dimensions are subject to change without notification.*