



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite 20 series is a recessed flanged troffer designed for gypsum type ceilings with a continuous piano hinge door for easy maintenance.

Specifications:

Construction: Die formed 20 gauge cold rolled steel. One-piece trim mounted on continuous piano hinge especially designed with a light trap feature to minimize light leak at the ceiling. Housing is finished with electrostatically applied white powder coat paint.


Reflector / Ballast: Ballast cover/reflector is finished with high reflectance white powder coat paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Shielding: A12 prismatic lens is standard shielding offering high efficiency illumination. Optional diffusers upon request.

Lamping: 1 or 2 lamp cross-section T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.

Mounting: Gypsum type ceiling. Non-IC rated.

Labels: UL / cUL listed. Non-IC rated. Damp location is optional.

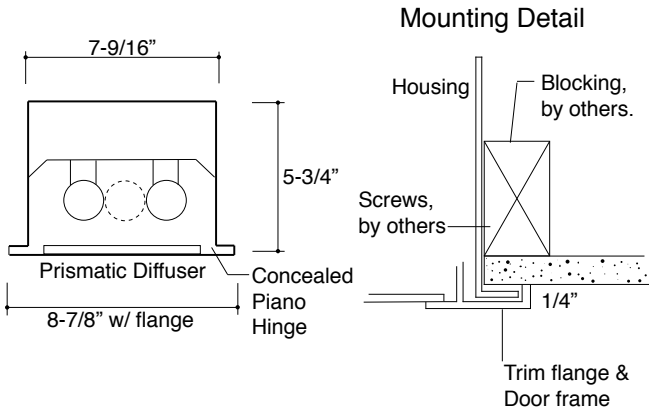

Length	Wattage	Cut-out Size
24"	14T5, 24T5HO, 17T8	7-5/8" x 24-1/8"
36"	21T5, 39T5HO, 25T8	7-5/8" x 36-1/8"
48"	28T5, 54T5HO, 32T8	7-5/8" x 48-1/8"

Ordering Information

Sample: 20-232T8-277-ISN-EM

Series	Lamp	Wattage	Voltage	Ballast	Options	
20	1	14T5	UNV 120 277 347 ¹	T8 Options	Ballast Factor	EM ² Emergency Battery Pack TP Tamper Resistant (Spanner head screws) DL Damp Location GLR Fusing FLEX3 6' of Flex, 3-wire
		24T5HO		IS (Standard) Instant Start	N Normal (Standard)	
	17T8	PS Program Start		L Low		
	21T5	HEIS High Efficiency Instant Start		H High		
	39T5HO	HEPS High Efficiency Program Start				
	25T8	T5/T5HO		Ballast Factor		
	28T5	PS (Standard) Program Start		N Normal		
	54T5HO	HEPS ¹ High Efficiency Program Start				
	32T8	All Lamp Dimming Options				
		DIM ¹ Dimming				
	SD ¹ Step Dimming					

Notes:

1. Consult factory.
2. Specific voltage must be ordered for this option. Consult factory for nominal 2' unit.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B Nulite reserves the right to bulk package any order.