



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite J series is a surface mounted fluorescent luminaire with a smooth curved acrylic diffuser. These are ideal for illuminating lavatories, dormitories, closets, laundries, hallways and general purpose areas.

Specifications:

Construction: Housing is die formed of heavy gauge cold rolled steel. Housing is finished with white enamel paint. Lens is 100% virgin cast acrylic with a 80/20 DR formula.


Reflector / Ballast: Ballast cover and pan is formed and finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 2, 3, 4, 6 or 8 lamp cross-section T5, T5HO, T8 and (2) U-Bent. Luminaire can be ordered with lamps, consult factory.


Mounting: Surface ceiling.

Labels: UL / cUL listed. Damp location is optional.


Nom. (1x4)

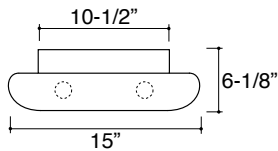

Diffuser Hinging Detail



Nom. (2x2 or 2x4)

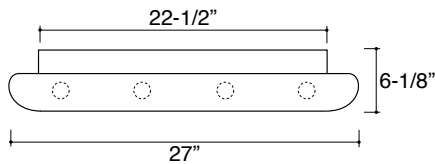

Nom. Size	Width	Length
1x4	15"	51-1/4"
2x2	27"	27-1/4"
2x4	27"	51-1/4"
4x4	51-1/4"	51-1/4"

Ordering Information

Sample: J24-432T8-277-HEPSN

Series/Size	Lamp	Wattage	Voltage	Ballast	Options
J14 (1x4)	(1x4)	(1x4 & 2x4)	UNV	T8 Options	EM ³ Emergency Battery Pack
	2	28T5	120	IS (Standard) Instant Start	
J22 (2x2)	(2x2)	54T5HO	277	PS Program Start	DL Damp Location
	2 - 32U6 only	32T8	347 ²	HEIS High Efficiency Instant Start	GLR Fusing
J44 (4x4)	3	(2x2)			HEPS High Efficiency Program Start
	(2x4)	14T5			
	3	24T5HO			
	3	17T8			
	4	32U6 ¹	T5/T5HO	Ballast Factor	
	(4x4)	(4x4)	PS (Standard) Program Start	N Normal	
	6	28T5	HEPS ² High Efficiency Program Start		
	8	32T8	All Lamp Dimming Options		
			DIM ² Dimming		
			SD ² Step Dimming		


Notes:

1. 2 lamp only in nominal 2x2 unit.
2. Consult factory.
3. Specific voltage must be ordered for this option. Consult factory for nominal 2' units.


Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B Nulite reserves the right to bulk package any order.

Photometric Curve

Cat.# J24-432T8...
Initial lamp lumens - 11600 (4 lamps)

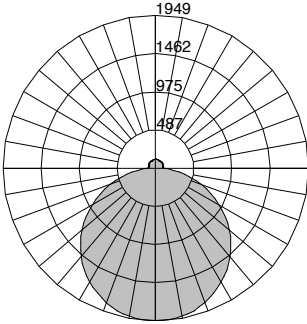

Typical plan view of 7/8" KOs on back of housing

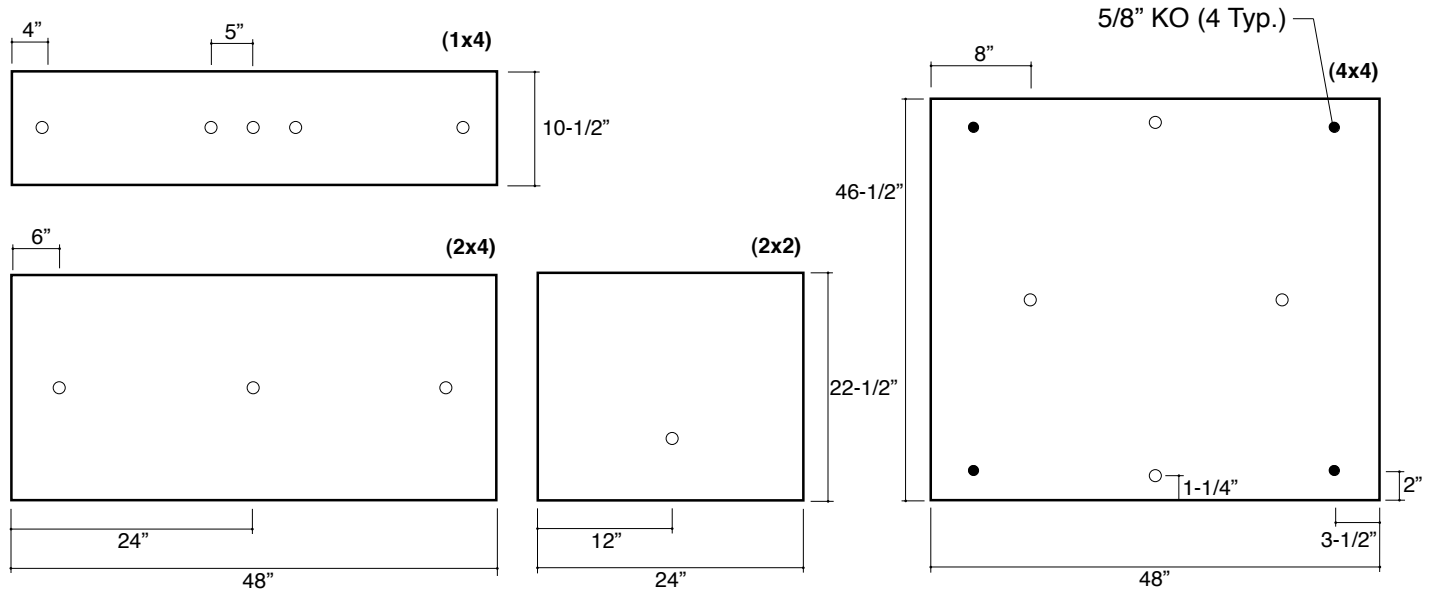

Specifications and dimensions are subject to change without notification.