



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite NS narrow strip is a specification grade luminaire. This compact fluorescent unit is available in 1 lamp configuration with an optional (NSR) 2" of couplers and flex conduit for radius applications.

Specifications:


Construction: Die formed 20 gauge cold rolled steel with 7/8" end KO's. The housing is finished in high reflectance white baked polyester powder coat paint after fabrication.

Reflector / Ballast: Ballast cover / reflector is finished with high reflectance white baked polyester powder coat paint after fabrication. Standard electronic, class P, ballast. Universal (UNV) voltage ballast is from 120V to 277V.


Lamping: 1-lamp low wattage twin tube compact fluorescent. Luminaire can be ordered with lamp, consult factory.

Mounting: Surface

Labels: UL / cUL listed. Suitable for Damp Location optional.



NRS Option (Radius)

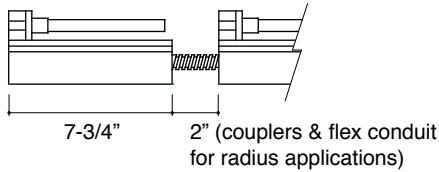

Ordering Information

Sample: NS-1PL13-UNV-DL

Series	Lamp	Wattage	Voltage	Options
NS	1	PL7	UNV	DL Damp Location
NSR (Radius)		PL9	120	SYM Symmetrical Reflector
		PL13	277	ASY Asymmetrical Reflector
				RASY Reverse Asymmetrical Reflector
(Consult factory for overlapping lamps)				