



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite BGL series meets “dark sky requirements” with a full cut-off distribution. This luminaire is offered in compact fluorescent, pulse start metal halide and high pressure sodium.

Specifications:


Construction: Die cast aluminum housing, tempered clear glass lens, engineered aluminum reflector - wide or forward throw distribution and powder coat paint finish - bronze (standard), white or black optional.

Reflector / Ballast: Reflector is specular aluminum engineered for performance with two distribution options - wide or forward throw. Ballast is electronic for CFL, and open core & coil style for HID.


Lamping: 1 lamp compact fluorescent, metal halide or high pressure sodium. Luminaire can be ordered with lamps, consult factory.

Mounting: Wall mounted for down lighting only. Designed to mount to an adequately supported 4” octagonal recessed outlet box by others.

Labels: UL / cUL listed, suitable for Wet Locations in down lighting applications only.

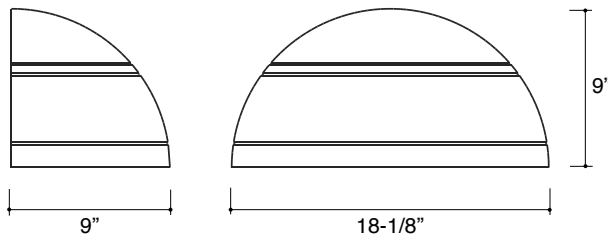

Mounting Plate (Gasketed)



Ordering Information

Sample: BGL-150MH-MT-BZ-FT

Series	Wattage	Voltage	Color	Options
BGL				
	Compact Fluorescent	UNV ¹	BZ Bronze (Standard)	WT Wide Throw Optics (Standard)
	126CFQ (1) 26W/G24q-3	120	BK Black	FT Forward Throw Optics
	132CFTR (1) 32W/GX24q-3	277	WH White	-20 ³ -20°F Cold Start Ballast
	142CFTR (1) 42W/GX24q-4	347 ²	Consult factory for custom colors.	EM ³ Emergency Battery Pack
	High Pressure Sodium	480 ²		GLR Fusing
	70HPS 70W HPS/MED	MT ² Multi-Tap		EMLT-4 ³ Low Temperature -4°F
	100HPS 100W HPS/MED	120/208/		Emergency Battery Pack
	150HPS 150W HPS/MED	240/277		
	Pulse Start Metal Halide			
	70MH 70W MH/MED			
	100MH 100W MH/MED			
	150MH 150W MH/MED			

Notes:

1. Universal voltage from 120 to 277V for compact fluorescent only.
2. Voltage option for HID only.
3. Compact fluorescent only. Specific voltage must be specified for EM.

