



Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite SEC series (right angle or right angle-side mount strip), is a commercial grade luminaire which is ideal for retail, residential, commercial and industrial applications.

Specifications:


Construction: Die formed 22 gauge cold rolled steel designed for maximum strength with 7/8" KO's. The housing finish is white polyester polymer with a minimum of 82% reflectance.

Reflector / Ballast: Ballast cover/reflector is finished with a minimum of 82% reflectance baked white enamel. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 2 or 3 lamp cross-section T8. Nominal 6' or 8' housing is a tandem lamp configuration. Luminaire can be ordered with lamps, consult factory.

Mounting: Luminaires may be surface mounted or suspended, individually or in continuous rows.

Labels: UL / cUL listed. Damp location is optional.

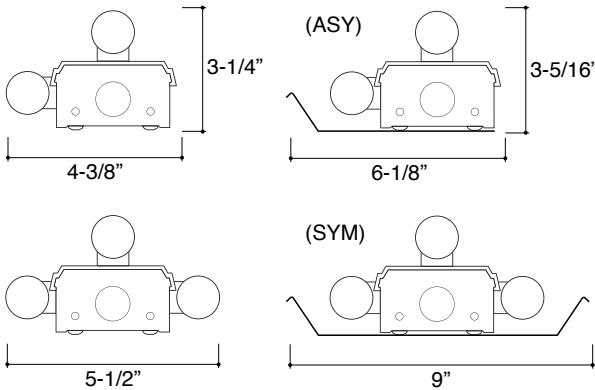

Length	Wattage
24"	17T8
36"	25T8
48"	32T8
72"	25T8-6
96"	32T8-8

Ordering Information

Sample: SEC-232T8-8-120-HEISN-ASY


Series	Lamp	Wattage	Voltage	Ballast	Options
SEC	2	17T8	UNV	T8 Options	Ballast Factor
				IS (Standard) Instant Start	N Normal (Standard)
SEC	3	25T8	120	PS Program Start	L Low
		32T8	277	HEIS High Efficiency Instant Start	H High
		25T8-6	347 ¹	HEPS High Efficiency Program Start	
		32T8-8			
				All Lamp Dimming Options	
				DIM ¹ Dimming	
				SD ¹ Step Dimming	

Notes:



1. Consult factory.
2. Consult factory for 2' unit. Specific voltage must be ordered for this option.
3. "ASY" option for 2-light cross section, and "SYM" option for 3-light cross section only.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B2 Nulite reserves the right to bulk package any order.


Photometric Curves



Cat.# SEC-232T8...*
Initial lamp lumens - 5800
Efficiency - 94%

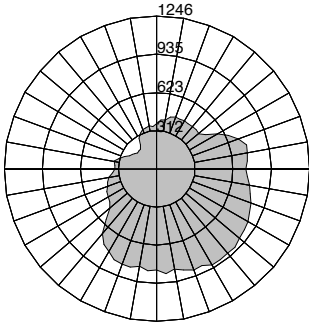


Cat.# SEC-332T8...*
Initial lamp lumens - 8700
Efficiency - 94%

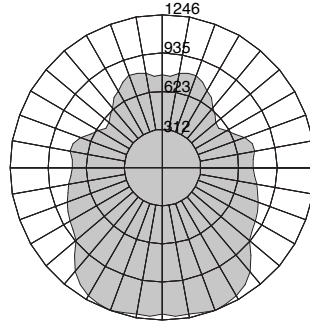

*Housing is finished with a minimum of 82% reflectance white polyester polymer.

Plan view of K.O. on back of channel

All side mount strips have 7/8" K.O. on both ends as well as on the back of the channel. In addition, each channel has eyelets and other holes for mounting by various means.

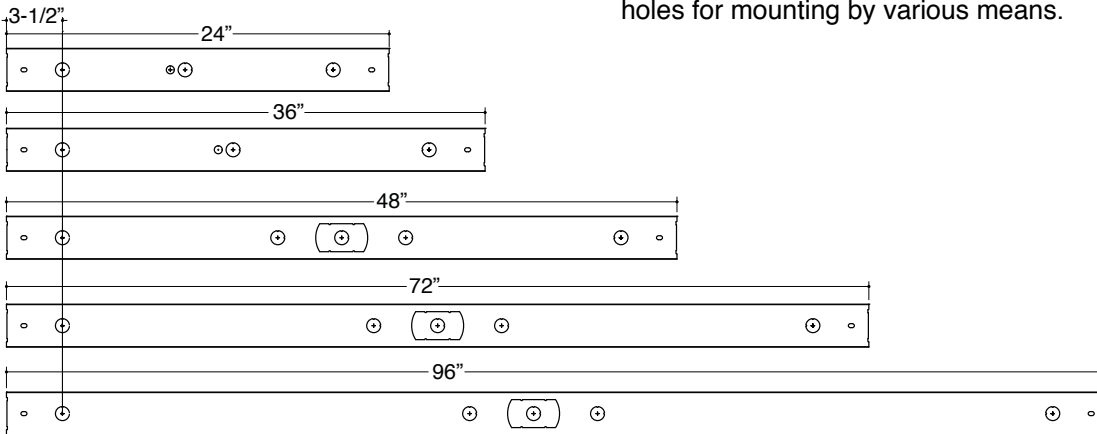

Specifications and dimensions are subject to change without notification.