



(1-light, nom. 4' only)



(2 or 3-light, nom. 2' or 4')

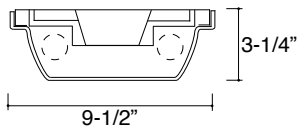

Length	Wattage
27"	14T5, 24T5HO, 17T8
51"	28T5, 54T5HO, 32T8

Project Name:	
Type:	Date:
Catalog #:	

Description:

The Nulite SVR series is a vandal resistant low profile surface mounted lensed luminaire. The polycarbonate prismatic / ribbed lens will hold up to high traffic and vandal applications.

Specifications:

Construction: Housing is die formed of 20 gauge cold rolled steel. Housing is finished with baked white enamel paint. Clear polycarbonate lens features pyramidal prism bottom and vertical ribbed perimeter provides maximum light control and efficiency. Lens is secured with tamper resistant spanner head screws.

Reflector / Ballast: Ballast cover/pan is formed and finished with high reflectance white paint. Standard electronic, Class P, ballast. Universal (UNV) voltage ballast is from 120 to 277V.

Lamping: 1, 2 or 3 lamp cross-section T5, T5HO or T8. Luminaire can be ordered with lamps, consult factory.

Mounting: Surface.

Labels: UL / cUL listed for Damp location. Wet location is optional.

Ordering Information

Sample: SVR-232T8-UNV-ISN-WL




Series	Lamp	Wattage	Voltage	Ballast	Options
SVR					
	1 ¹	14T5	UNV	T8 Options	EM ⁴ Emergency Battery Pack
	2	24T5HO	120	IS (Standard) Instant Start	N Normal (Standard)
	3 ²	17T8	277	PS Program Start	L Low
		28T5	347 ³	HEIS High Efficiency Instant Start	H High
		54T5HO		HEPS High Efficiency Program Start	
		32T8		T5/T5HO	Ballast Factor
				PS (Standard) Program Start	N Normal
				HEPS ³ High Efficiency Program Start	
				All Lamp Dimming Options	
				DIM ³ Dimming	
				SD ³ Step Dimming	

Notes:

- 1-Lamp cross-section is only available in nominal 4' length.
- 3-Lamp cross-section is only available for 32W T8.
- Consult factory.
- Specific voltage must be ordered for this option. Consult factory for nominal 2' units.

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2010 Rev. B Nulite reserves the right to bulk package any order.

Plan view of KOs on back of housing

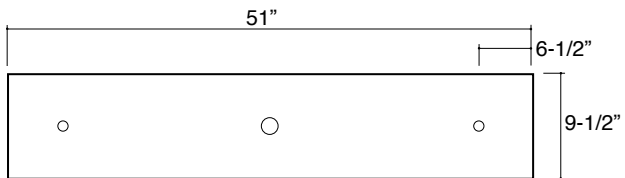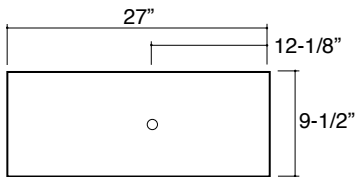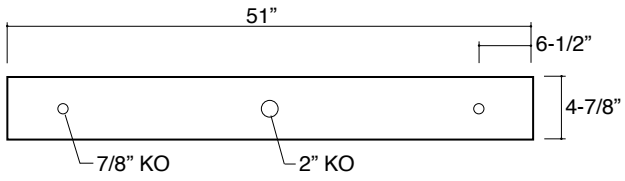

Specifications and dimensions are subject to change without notification.